

THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

CR2238 — Cherrylock bulbed, 100° flush head

Cherrylock bulbed blind rivet, 100° flush head, Inconel 600 stem, 5056 aluminum sleeve, Monel lock ring: nominal sizes, grip ranges and commonly stocked part numbers.

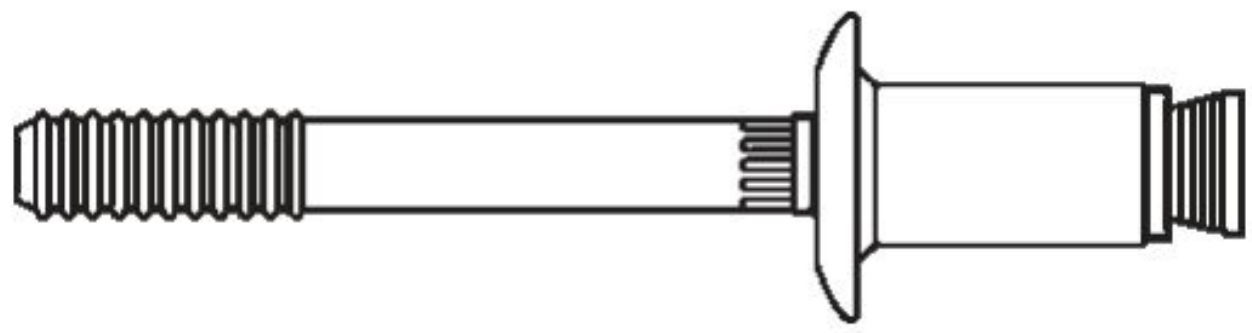

CR2238

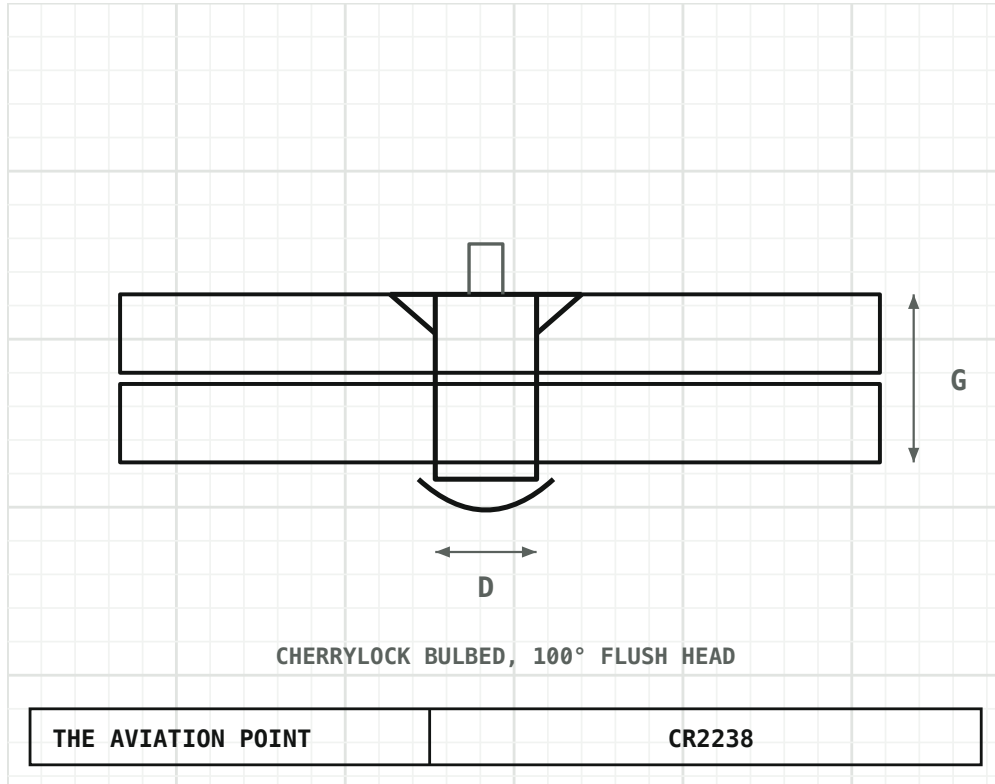

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Blind rivet, Cherrylock, bulbed
Material	Inconel 600 stem; 5056 aluminum sleeve; Monel lock ring
Status	Listing data: sizes and part numbers commonly stocked. The standard or manufacturer drawing governs; check its current issue before design use.

Dimensions by size

Dimension, in	1/8
D — Nominal diameter, as printed	1/8

Nominal diameters as listed. Dimensions not given there are not stated here; take them from the standard.

Part numbers

1/8 4 part numbers

Part no.	Grip min, in	Grip max, in
CR2238-4-02	.063	.125
CR2238-4-03	.126	.187
CR2238-4-04	.188	.250
CR2238-4-05	.251	.312

How to read the part number

Part	Meaning
Format	CR2238-<dash>
Example	CR2238-4-05 — diameter dash 4 (1/8), grip dash 05 (grip range .251-.312 in)

Notes

- Part number: basic number, diameter dash, grip dash (the first digit is the diameter, the two digits after the hyphen the grip).
- Grip 01 (.045-.062) is not offered in this head style in the listing.
- Part numbers and grip ranges are as listed in commercial listing data; combinations shown as blank or '---' there are not listed here.
- Approved data governs. Use the fastener the SRM, drawing or IPC calls for.

SOURCES · CR2238 — Cherrylock bulbed blind rivet, 100° flush head, Inconel 600 stem, 5056 aluminum sleeve, Monel lock ring

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/blind-fasteners/cr2238/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.