

THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

CR2245 — Cherrylock bulbed, unisink head

Cherrylock bulbed blind rivet, unisink head, aluminum rivet, 8740 steel stem: nominal sizes, grip ranges and commonly stocked part numbers.

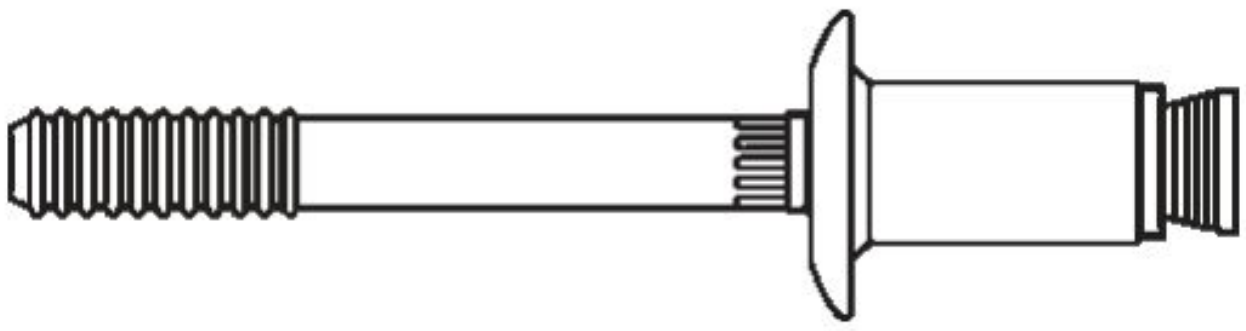

CR2245

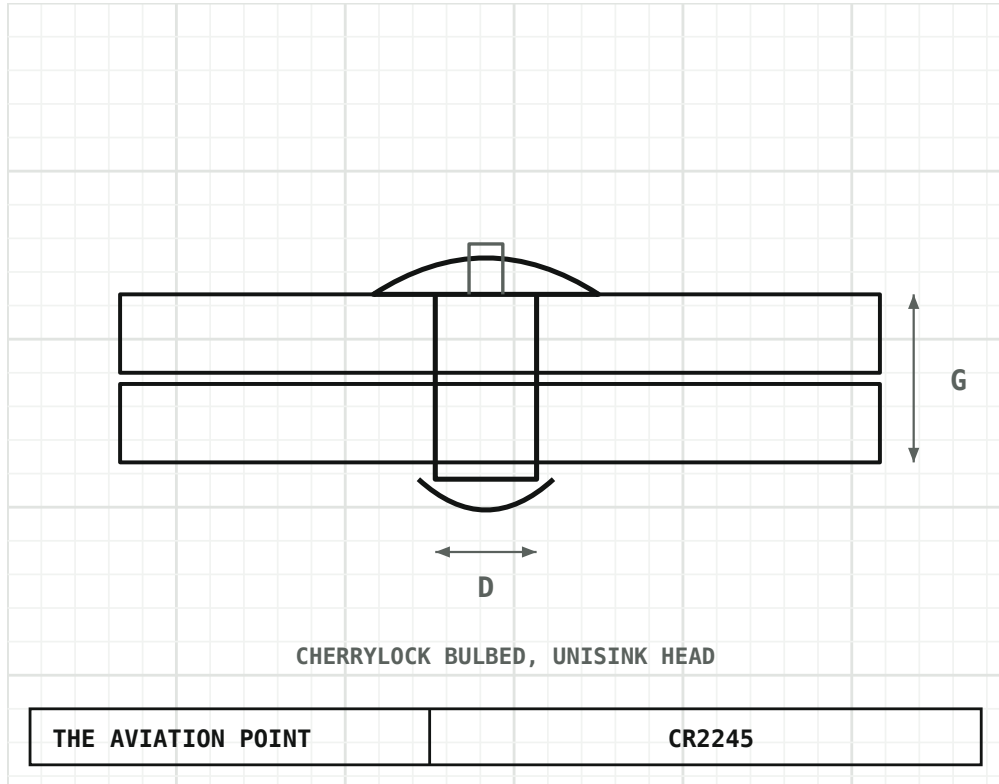

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Blind rivet, Cherrylock, bulbed
Material	Aluminum rivet; 8740 steel stem
Status	Listing data: sizes and part numbers commonly stocked. The standard or manufacturer drawing governs; check its current issue before design use.

Dimensions by size

Dimension, in	1/8
D — Nominal diameter, as printed	1/8

Nominal diameters as listed. Dimensions not given there are not stated here; take them from the standard.

Part numbers

1/8 5 part numbers

Part no.	Grip min, in	Grip max, in
CR2245-4-01	.045	.062
CR2245-4-02	.063	.125
CR2245-4-03	.126	.187
CR2245-4-04	.188	.250
CR2245-4-05	.251	.312

How to read the part number

Part	Meaning
Format	CR2245-<dash>
Example	CR2245-4-05 — diameter dash 4 (1/8), grip dash 05 (grip range .251-.312 in)

Notes

- Part number: basic number, diameter dash, grip dash (the first digit is the diameter, the two digits after the hyphen the grip).
- Part numbers and grip ranges are as listed in commercial listing data; combinations shown as blank or '---' there are not listed here.
- Approved data governs. Use the fastener the SRM, drawing or IPC calls for.

SOURCES · CR2245 — Cherrylock bulbed blind rivet, unisink head, aluminum rivet, 8740 steel stem

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/blind-fasteners/cr2245/