
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM

CR2662 — Cherry wire draw, countersunk head, Monel lock ring

Cherry wire-draw blind rivet, countersunk head, corrosion resistant, Monel lock ring: nominal sizes, grip ranges and commonly stocked part numbers.



CR2662

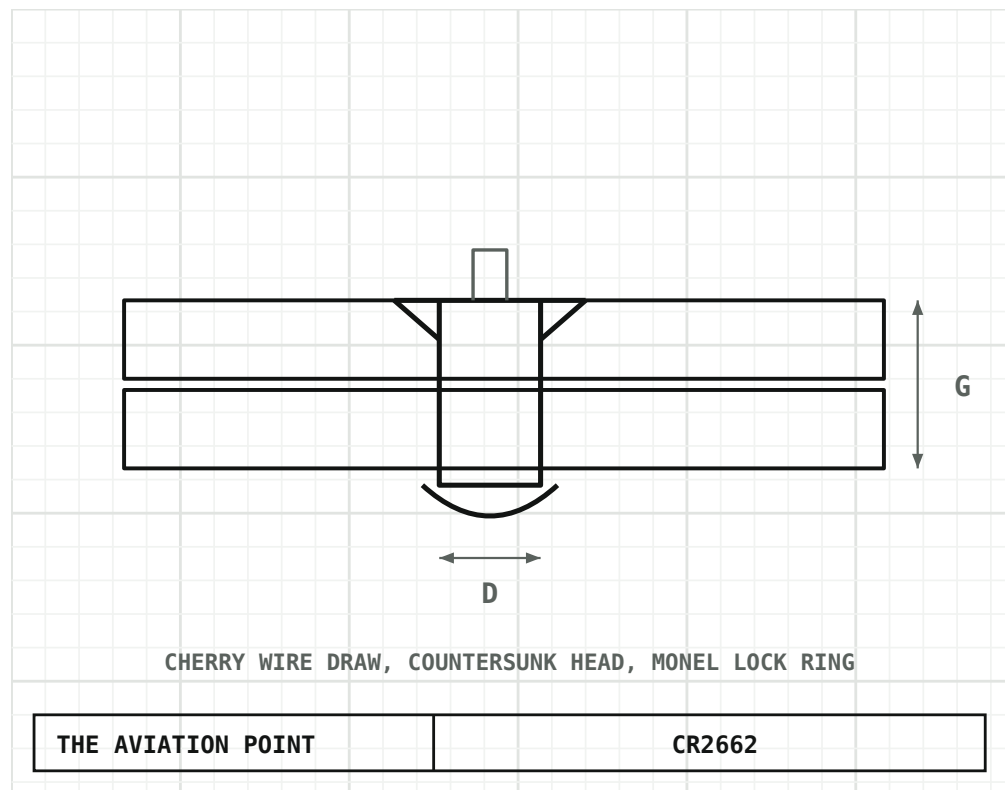

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Blind rivet, wire draw
Material	Corrosion resistant rivet; Monel lock ring
Status	Listing data: sizes and part numbers commonly stocked. The standard or manufacturer drawing governs; check its current issue before design use.

Dimensions by size

Dimension, in	3/32
D — Nominal diameter, as printed	3/32

Nominal diameters as listed. Dimensions not given there are not stated here; take them from the standard.

Part numbers

3/32 5 part numbers

Part no.	Grip min, in	Grip max, in
CR2662-3-02	.063	.125
CR2662-3-03	.126	.187
CR2662-3-04	.188	.250
CR2662-3-05	.251	.312
CR2662-3-06	.313	.375

How to read the part number

Part	Meaning
Format	CR2662-<dash>
Example	CR2662-3-06 — diameter dash 3 (3/32), grip dash 06 (grip range .313-.375 in)

Notes

- Part number: basic number, diameter dash, grip dash (the first digit is the diameter, the two digits after the hyphen the grip).
- The listing gives the material only as 'corrosion resistant' with a Monel lock ring.
- Part numbers and grip ranges are as listed in commercial listing data; combinations shown as blank or '---' there are not listed here.
- Approved data governs. Use the fastener the SRM, drawing or IPC calls for.

SOURCES · CR2662 — Cherry wire-draw blind rivet, countersunk head, corrosion resistant, Monel lock ring

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/blind-fasteners/cr2662/