
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM

HL30 pin — protruding shear head, 431 stainless steel

Hi-Lok Pin, Protruding Shear Head, 431 Stainless Steel: dimensions by size, strength and every listed part number.



HL30

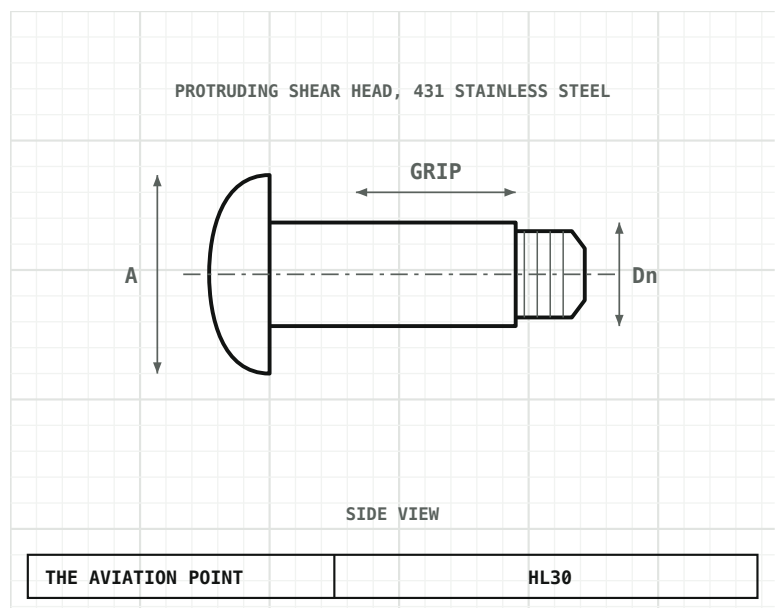

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Hi-Lok pin, protruding shear head, stainless
Material	431 stainless steel
Status	Check the current issue before design use.

Dimensions by size

Dimension, in	8-32	10-32
Nominal diameter	5/32	3/16
A — Head diameter (max / min)	.262 – .242	.315 – .295
B — Ref. (see drawing)	.325	.325
TD — Threaded-end diameter (max / min)	.1595 – .1570	.1840 – .1810
G — G, ref.	.020	.025
H — H (max / min, see drawing)	.047 – .037	.055 – .045
Thread	8-32	10-32
Double shear, lb min	5,280	7,060
Tension, lb min	2,000	3,000
Dn — Shank diameter, without coating or solid film lube (max / min)	.1635 – .1630	.1895 – .1890
Dc — Shank diameter, with coating or solid film lube (max / min)	.1635 – .1625	.1895 – .1885

Dimensions as tabulated in the catalogue, by first dash number (nominal diameter). Max – min where a tolerance is shown.

Part numbers

5/32 5 part numbers

Part no.	Max grip, in
HL30-5-2	1/8
HL30-5-3	3/16
HL30-5-4	1/4
HL30-5-5	5/16
HL30-5-6	3/8

3/16 5 part numbers

Part no.	Max grip, in
HL30-6-2	1/8
HL30-6-3	3/16
HL30-6-4	1/4
HL30-6-5	5/16
HL30-6-6	3/8

How to read the part number

Part	Meaning
Format	HL30-<dash>
Example	HL30-5-2 — 5/32 nominal diameter, max grip 1/8 in

Notes

- Approved data governs. Use the pin the drawing, SRM or IPC calls for.
- Grip: the number after the second dash is the max grip in 1/16 in (dash -2 = 1/8 in, -3 = 3/16 in, and so on). Maximum-minimum values are shown as max – min.
- Collars listed for this pin in the catalogue quick-reference chart: HL70, HL79, HL82, HL94.

SOURCES · HL30 — Hi-Lok Pin, Protruding Shear Head, 431 Stainless Steel

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/hi-lok/hl30/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.