
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

NAS1473 nutplate — two lug, floating, capped

Nutplate, Two Lug, Floating, Capped: dimensions by thread size and every listed part number.



NAS1473

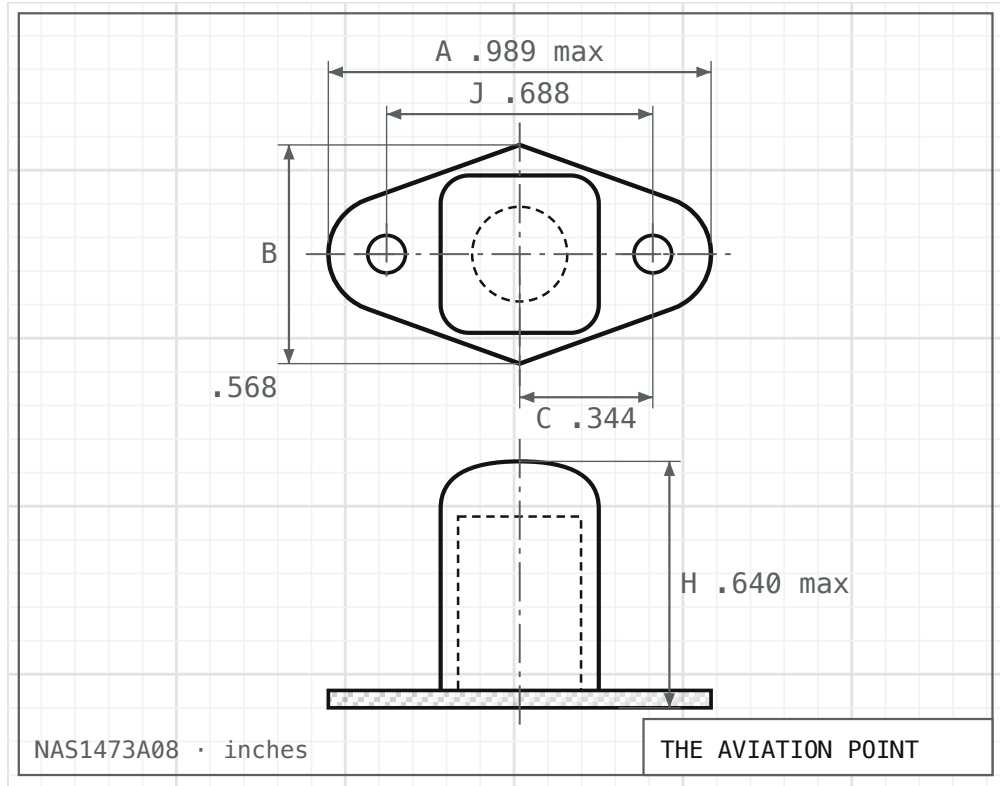

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Nutplate, two lug, floating, capped
Status	Check the current issue before design use.

Dimensions by size

Dimension, in	8-32	10-32	1/4-28	5/16-24
A — Overall length, max	.989	.989	1.296	1.296
B — Overall width, max	.568	.568	.668	.762
C — Rivet-hole dimension, max (see drawing)	.344	.344	.500	.500
J — Rivet spacing, max (see drawing)	.688	.688	1.000	1.000
Thread	8-32	10-32	1/4-28	5/16-24
Height, max	.640	.640	.755	.823

Dimensions as tabulated in the catalogue; every value is a maximum unless marked.

Part numbers

8-32 2 part numbers

Part no.	Height, max
NAS1473A08	.640
NAS1473C08	.640

10-32 2 part numbers

Part no.	Height, max
NAS1473A3	.640
NAS1473C3	.640

1/4-28 2 part numbers

Part no.	Height, max
NAS1473A4	.755
NAS1473C4	.755

5/16-24 2 part numbers

Part no.	Height, max
NAS1473A5	.823
NAS1473C5	.823

How to read the part number

Part	Meaning
Example	NAS1473A08 — 8-32 thread, prefix A

Notes

- The catalogue prints two part-number columns under the standard number (prefix A and prefix C) and does not say what separates them; the standard defines the difference.
- Approved data governs. Use the nutplate the drawing, SRM or IPC calls for.

SOURCES · NAS1473 — Nutplate, Two Lug, Floating, Capped

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/nuts/nas1473/