

THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

NAS4703 — 100° reduced head, tri-wing recess, .1900-32 thread

Bolt, 100° Close Tolerance, Reduced Head, Tri-Wing Recess, Alloy Steel: thread, grip, length and commonly stocked part numbers.

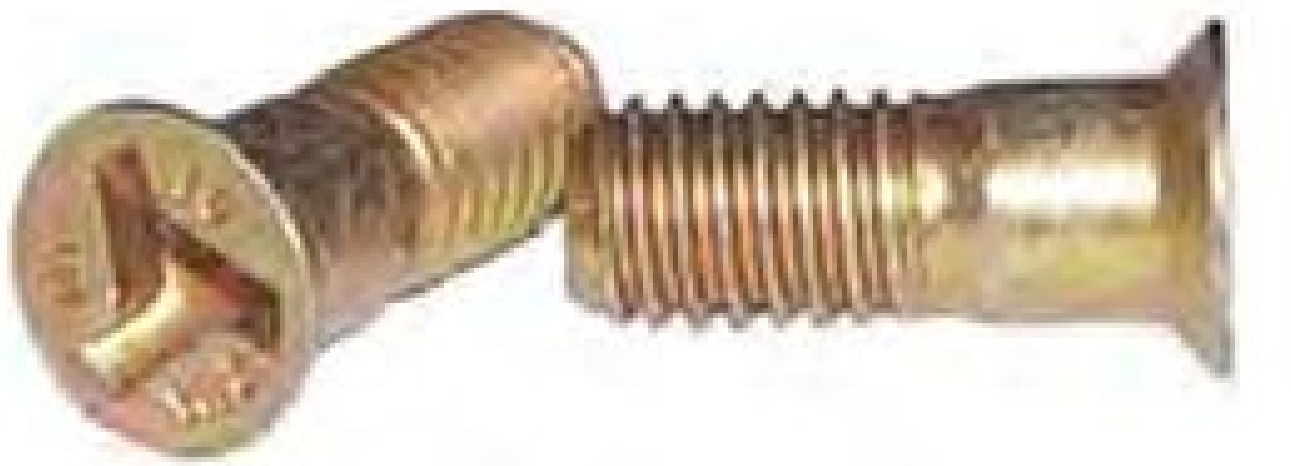

NAS4703

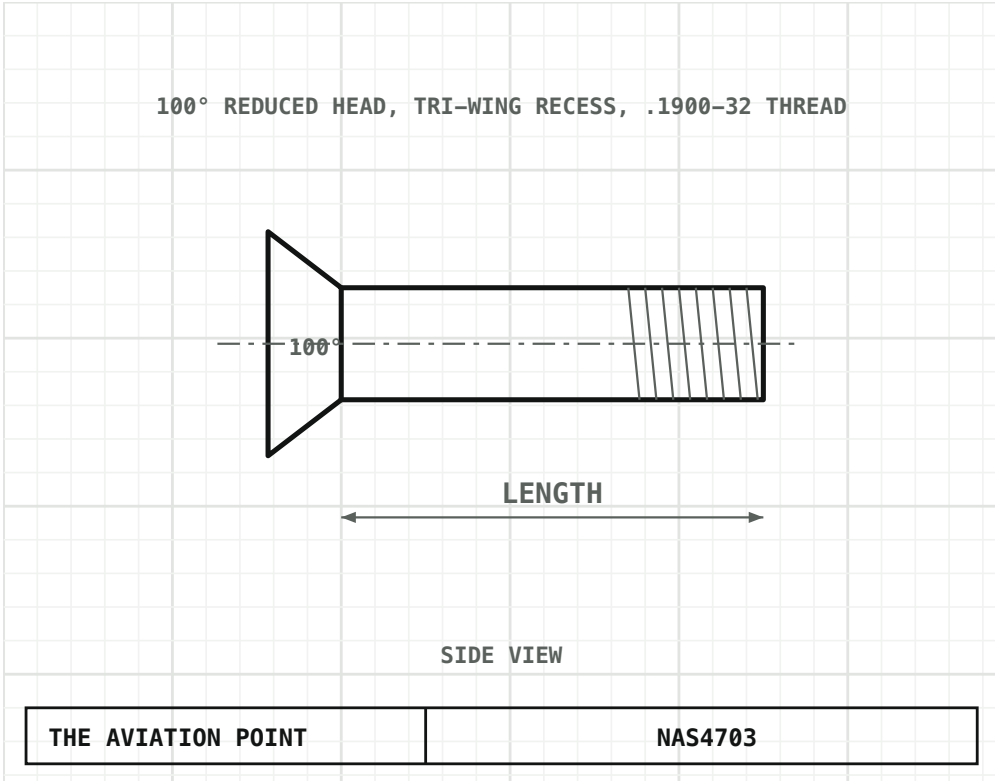

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	100° close tolerance bolt
Material	Alloy steel
Status	Check the current issue before design use.

Dimensions by size

Dimension, in	.1900-32
Thread	.1900-32

Thread as stated for the standard. Head and shank dimensions are not shown here: take them from the standard.

Part numbers

.1900-32 8 part numbers

Part no.	Grip, in	Length, in
NAS4703-1	.062	.385
NAS4703-2	.125	.448
NAS4703-3	.188	.511
NAS4703-4	.250	.573
NAS4703-5	.312	.635
NAS4703-6	.375	.698
NAS4703-7	.438	.761
NAS4703-8	.500	.823

How to read the part number

Part	Meaning
Format	NAS4703-<dash>
Example	NAS4703-1 — 100° close tolerance bolt, .1900-32 thread, grip .062, length .385

Notes

- Part number format as commonly written; check the standard for the exact format.
- Approved data governs. Use the bolt the SRM, drawing or IPC calls for.

SOURCES · NAS4703 — Bolt, 100° Close Tolerance, Reduced Head, Tri-Wing Recess, Alloy Steel

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/structural-bolts/nas4703/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.