
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

NAS6606 — close tolerance bolt, .3750-24 thread

Bolt, Close Tolerance: thread, grip, length and commonly stocked part numbers.



NAS6606

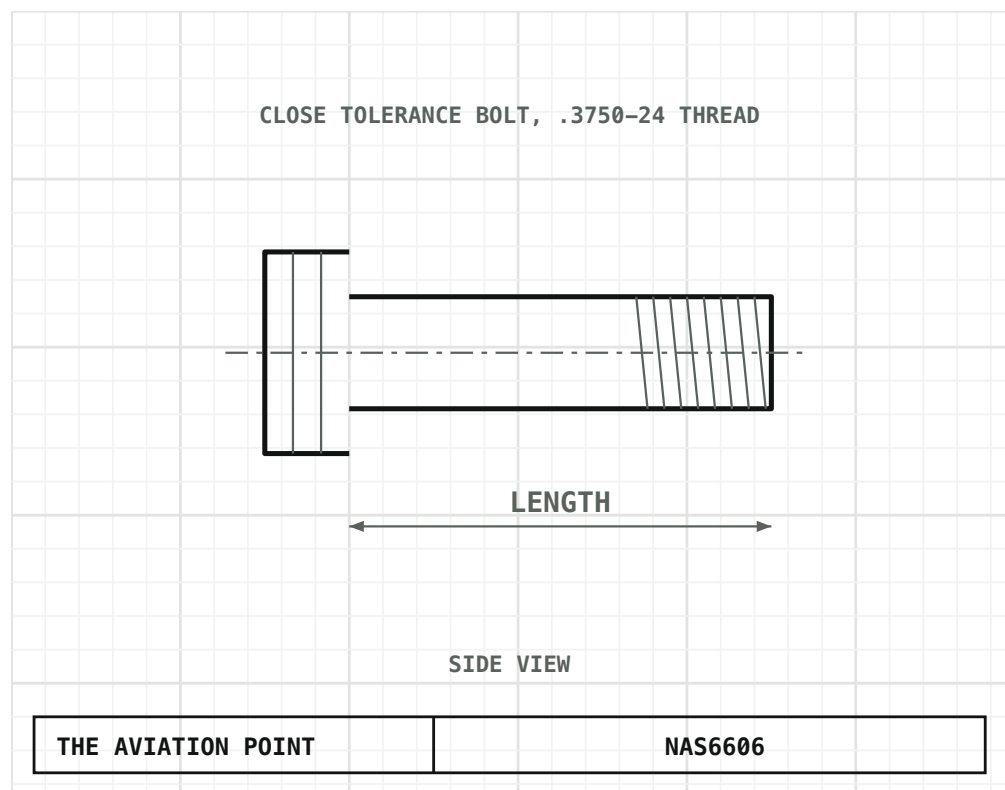

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Close tolerance bolt
Status	Check the current issue before design use.

Dimensions by size

Dimension, in	.3750-24
Thread	.3750-24

Thread as stated for the standard. Head and shank dimensions are not shown here: take them from the standard.

Part numbers

.3750-24 64 part numbers

Part no.	Grip, in	Length, in
NAS6606-5	.312	.890
NAS6606-D5	.312	.890
NAS6606-6	.375	.954
NAS6606-D6	.375	.954
NAS6606-7	.438	1.016
NAS6606-D7	.438	1.016
NAS6606-8	.500	1.078
NAS6606-D8	.500	1.078
NAS6606-9	.562	1.140
NAS6606-D9	.562	1.140
NAS6606-10	.625	1.203
NAS6606-D10	.625	1.203
NAS6606-11	.688	1.266
NAS6606-D11	.688	1.266
NAS6606-12	.750	1.328
NAS6606-D12	.750	1.328
NAS6606-13	.812	1.390
NAS6606-D13	.812	1.390
NAS6606-14	.875	1.453
NAS6606-D14	.875	1.453
NAS6606-15	.938	1.516
NAS6606-D15	.938	1.516
NAS6606-16	1.000	1.578
NAS6606-D16	1.000	1.578
NAS6606-17	1.062	1.640
NAS6606-D17	1.062	1.640
NAS6606-18	1.125	1.703
NAS6606-D18	1.125	1.703
NAS6606-19	1.188	1.766
NAS6606-D19	1.188	1.766
NAS6606-20	1.250	1.828
NAS6606-D20	1.250	1.828
NAS6606-21	1.312	1.890
NAS6606-D21	1.312	1.890
NAS6606-22	1.375	1.953
NAS6606-D22	1.375	1.953
NAS6606-23	1.438	2.016
NAS6606-D23	1.438	2.016
NAS6606-24	1.500	2.078
NAS6606-D24	1.500	2.078
NAS6606-25	1.562	2.140
NAS6606-D25	1.562	2.140
NAS6606-26	1.625	2.203
NAS6606-D26	1.625	2.203
NAS6606-27	1.688	2.266
NAS6606-D27	1.688	2.266
NAS6606-28	1.750	2.328
NAS6606-D28	1.750	2.328
NAS6606-29	1.812	2.390
NAS6606-D29	1.812	2.390
NAS6606-30	1.875	2.453
NAS6606-D30	1.875	2.453
NAS6606-31	1.938	2.516
NAS6606-D31	1.938	2.516
NAS6606-32	2.000	2.578
NAS6606-D32	2.000	2.578
NAS6606-34	2.125	2.703
NAS6606-D34	2.125	2.703
NAS6606-36	2.250	2.828
NAS6606-D36	2.250	2.828
NAS6606-38	2.375	2.953
NAS6606-D38	2.375	2.953
NAS6606-39	2.438	3.016
NAS6606-D39	2.438	3.016

How to read the part number

Part	Meaning
Format	NAS6606-<dash>
D	Drill: D before the dash number: drilled shank
H	Drill: H: drilled head
Example	NAS6606-5 — Close tolerance bolt, .3750-24 thread, grip .312, length .890, undrilled

Notes

- Grip tolerance ±.010.

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.

THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM

- Listed as superseding the NAS1306 series.
- Part number format as commonly written; check the standard for the exact format.
- Approved data governs. Use the bolt the SRM, drawing or IPC calls for.

SOURCES · NAS6606 — Bolt, Close Tolerance

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/structural-bolts/nas6606/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.

THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM