
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT

47FLW nut — double hexagon flexloc, flanged, 180 ksi, cadmium II plated

Self-Locking Nut, Double Hexagon, Flanged, Alloy Steel, 180 KSI, 450 °F, Cadmium Ii Plated: dimensions by thread size and part numbers as listed.



47FLW

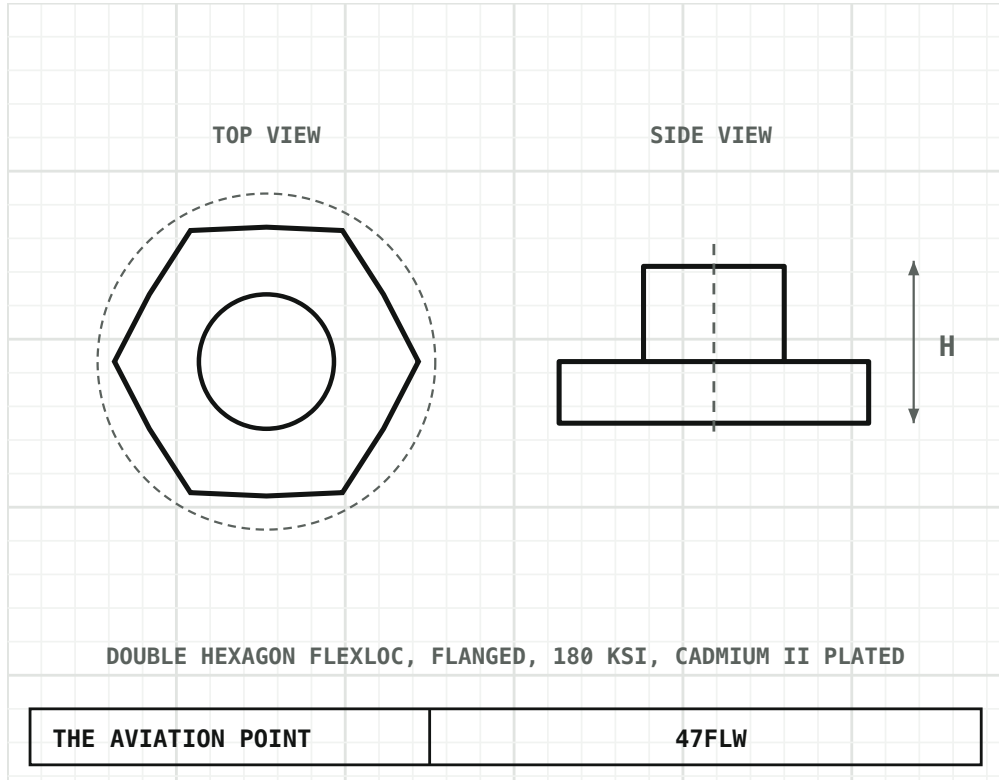

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Self-locking nut
Material	Alloy steel, 180 ksi, cadmium II plated
Max. temperature	450 °F
Status	Check the current issue of the standard before design use.

Dimensions by size

Dimension, in	.3125-24	.3750-24	.4375-20	.5000-20
A — Flange diameter, max	.547	.654	.753	.863
B — B, min	.517	.624	.713	.823
C — C, min	.491	.561	.631	.703
H — Height, max	.363	.438	.506	.549
W max — Across flats, max	.439	.502	.564	.627
W min — Across flats, min	.430	.492	.553	.616
AX — Axial strength, lb min	11,500	17,100	23,200	30,900

Dimensions in inches, as tabulated for the part. Blank cells (—): not stated in the documents we hold; take them from the standard.

Part numbers

Part no.	Size
47FLW-524	.3125-24
47FLW-624	.3750-24
47FLW-720	.4375-20
47FLW-820	.5000-20

Part numbers as listed for the part; the standard governs and may list others.

How to read the part number

Part	Meaning
Example	47FLW524 — .3125-24, cadmium II plated

Notes

- Lightweight, flanged, double-hexagon flexloc nut; the dimension table of the listing covers dash 428 to 1018 for both series; only the sizes listed under this prefix are shown.
- Part number format as commonly written; check the standard for the exact format.
- Approved data governs. Use the nut the SRM, drawing or IPC calls for.

SOURCES · 47FLW — Self-Locking Nut, Double Hexagon, Flanged, Alloy Steel, 180 KSI, 450 °F, Cadmium Ii Plated

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/nuts/47flw/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.