
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM

ASNA0061 — CherryLOCK family, partner NAS1399

Blind rivet with locking collar, CherryLOCK family, partner NAS1399.



Photo · CherryLOCK Wiredraw rivet, 100° countersunk (NAS1399). Greyscale photo of the product

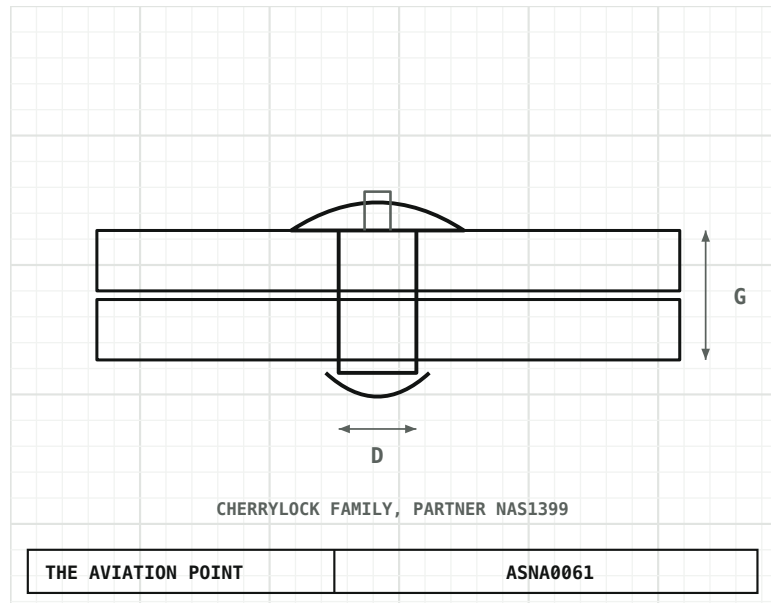

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Blind rivet, with locking collar
Status	Cross-only card: the partner numbers, evidence ranked, and no sizes. No source states the unit of the size digits, so each number carries the NAS1399 partner it pairs with instead of a size.

Part numbers

Paired with the NAS1399 series 9 part numbers

Part no.	Partner (evidence)
ASNA0061-30230	NAS1399C3-2 (listing)
ASNA0061-30231	NAS1399CW3-2 (listing)
ASNA0061-30330	NAS1399C3-3 (listing)
ASNA0061-30331	NAS1399CW3-3 (listing)
ASNA0061-30430	NAS1399C3-4 (listing)
ASNA0061-30730	NAS1399C3-7 (NSN)
ASNA0061-40330	NAS1399C4-3 (listing)
ASNA0061-40530	NAS1399C4-5 (NSN)
ASNA0061-50430	NAS1399C5-4 (listing)

How to read the part number

ASNA0061 - 30230

- **ASNA standard** — CherryLOCK type
- **Diameter** — in 1/32": 3 = 3/32"
- **Grip** — max, in 1/16": 02 = 1/8"
- **Finish** — 30 = as NAS letters C

Segment	Reads as	Unit of the code · from
ASNA0061 Standard	Blind rivet with locking collar, CherryLOCK family, partner NAS1399.	None: the number of the standard · The standard
3 Diameter	Same digit as its NAS partner: 3/32 in nominal (0.094 in · 2.381 mm, our conversion).	1/32 in through the NAS partner (no source states the unit) · Not given by the standard (no size table): read through the NAS partner NAS1399
02 Grip	Max grip 2/16 in = 1/8 in, same digits as the NAS partner (0.125 in · 3.175 mm, our conversion).	1/16 in, maximum grip, through the NAS partner (no source states the unit) · Not given by the standard (no size table): read through the NAS partner NAS1399
30 Finish	Pairs with NAS letters C: C = stainless (sheet for NAS1398/1399: C head mark stainless)	A pairing code, no unit · Pairing with the NAS partner's letters, as seen in the cross data

ASNA0061-30230 reads: **ASNA0061** CherryLOCK-type blind rivet · **3** 3/32 in · **02** max 1/8 in · **30** as NAS letters C.

Notes

- Part number: ASNA0061, a dash, then a diameter digit, two grip digits and two material or finish digits.
- Material and finish suffixes seen: 30 = NAS letter C (stainless), 31 = CW (stainless, cadmium plated), 20 = M (Monel), 21 = MW (Monel with cadmium W, by analogy). Others are not explained by our sources.
- The unit of the size digits is not stated by any source, so this card gives the partner number and no size. Do not size a hole from this card; use the partner's data sheet.

SOURCES · ASNA0061 standard · US federal item records and distributor listings

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/blind-fasteners/asna0061/