
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM

ASNA0062 — CherryLOCK family, partner NAS1398

Blind rivet with locking collar, CherryLOCK family, partner NAS1398.



Photo · blind rivet, universal (protruding) head. Grey-scale photo: the colour of the driving anvil and the stem material do not show

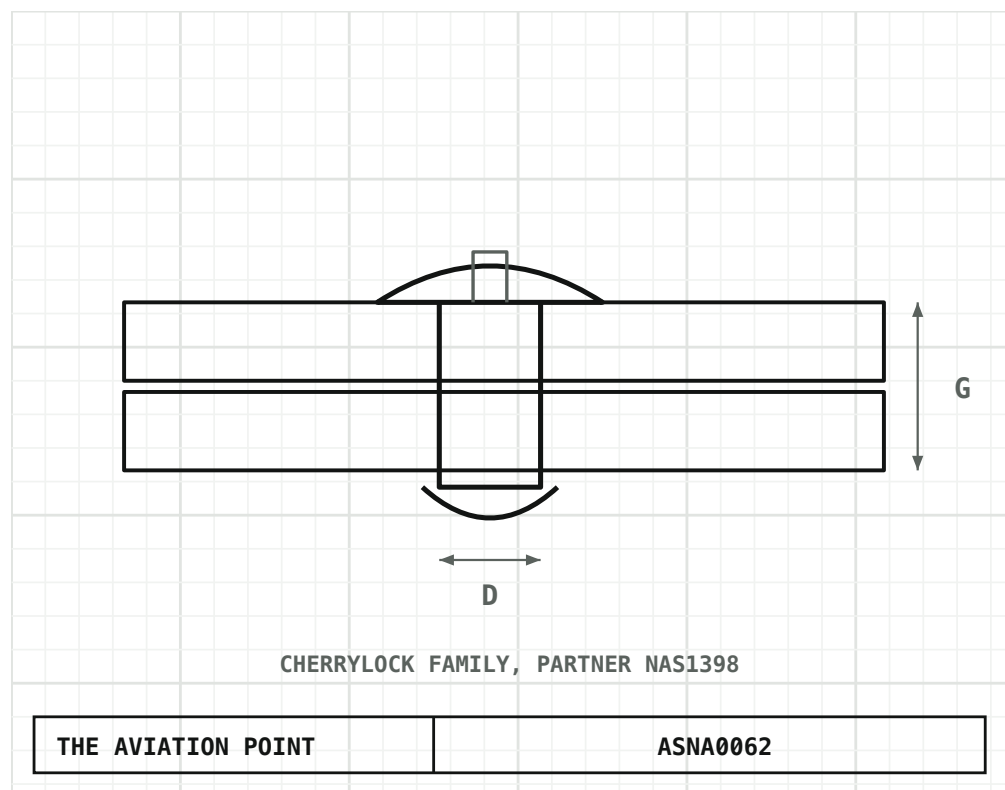

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	Blind rivet, with locking collar
Status	Cross-only card: the partner numbers, evidence ranked, and no sizes. No source states the unit of the size digits, so each number carries the NAS1398 partner it pairs with instead of a size.

Part numbers

Paired with the NAS1398 series 2 part numbers

Part no.	Partner (evidence)
ASNA0062-30331	NAS1398CW3-3 (listing)
ASNA0062-40411	NAS1398D4-4 (listing)

How to read the part number

ASNA0062 - 30331

- **ASNA standard** — CherryLOCK type
- **Diameter** — in 1/32": 3 = 3/32"
- **Grip** — max, in 1/16": 03 = 3/16"
- **Finish** — 31 = as NAS letters CW

Segment	Reads as	Unit of the code · from
ASNA0062 Standard	Blind rivet with locking collar, CherryLOCK family, partner NAS1398.	None: the number of the standard · The standard
3 Diameter	Same digit as its NAS partner: 3/32 in nominal (0.094 in · 2.381 mm, our conversion).	1/32 in through the NAS partner (no source states the unit) · Not given by the standard (no size table): read through the NAS partner NAS1398
03 Grip	Max grip 3/16 in, same digits as the NAS partner (0.188 in · 4.762 mm, our conversion).	1/16 in, maximum grip, through the NAS partner (no source states the unit) · Not given by the standard (no size table): read through the NAS partner NAS1398
31 Finish	Pairs with NAS letters CW: CW = stainless, cadmium plated (stated for NAS1398/1399)	A pairing code, no unit · Pairing with the NAS partner's letters, as seen in the cross data

ASNA0062-30331 reads: **ASNA0062** CherryLOCK-type blind rivet · **3** 3/32 in · **03** max 3/16 in · **31** as NAS letters CW.

Notes

- Part number: ASNA0062, a dash, then a diameter digit, two grip digits and two material or finish digits.
- Material and finish suffixes seen: 30 = NAS letter C (stainless), 31 = CW (stainless, cadmium plated), 20 = M (Monel), 21 = MW (Monel with cadmium W, by analogy). Others are not explained by our sources.
- The unit of the size digits is not stated by any source, so this card gives the partner number and no size. Do not size a hole from this card; use the partner's data sheet.

SOURCES · ASNA0062 standard · US federal item records and distributor listings

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/blind-fasteners/asna0062/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.