
THE AVIATION POINT · THEAVIATIONPOINT.COM · THE AVIATION POINT · THEAVIATIONPOINT.COM

NAS4403 — 100° close tolerance, tri-slot recess, .1900-32 thread

Bolt, 100° Close Tolerance, Tri-Slot Recess: thread, grip, length and commonly stocked part numbers.



NAS4403

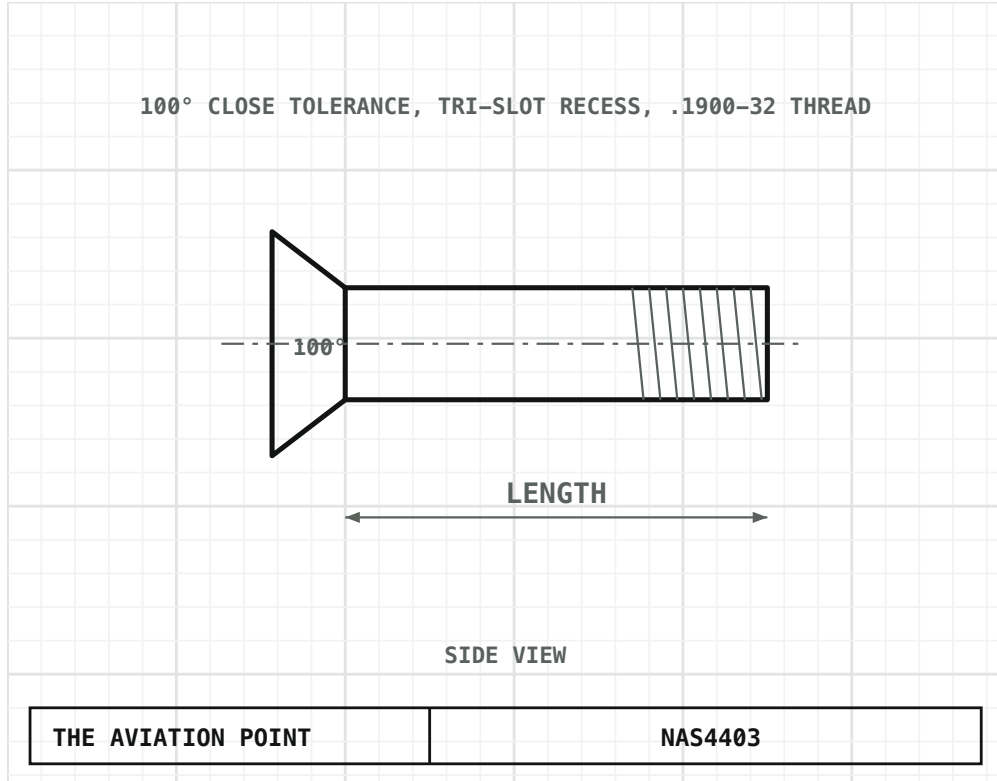

Engineering drawing · dimensions in inches

Specification

Item	Value
Type	100° close tolerance bolt
Status	Check the current issue before design use.

Dimensions by size

Dimension, in	.1900-32
Thread	.1900-32

Thread as stated for the standard. Head and shank dimensions are not shown here: take them from the standard.

Part numbers

.1900-32 13 part numbers

Part no.	Grip, in	Length, in
NAS4403-2	.125	.448
NAS4403-3	.188	.511
NAS4403-4	.250	.573
NAS4403-5	.312	.635
NAS4403-6	.375	.698
NAS4403-7	.438	.761
NAS4403-8	.500	.823
NAS4403-9	.562	.885
NAS4403-10	.625	.948
NAS4403-11	.688	1.011
NAS4403-12	.750	1.073
NAS4403-14	.875	1.198
NAS4403-15	.938	1.261

How to read the part number

Part	Meaning
Format	NAS4403-<dash>
Example	NAS4403-2 — 100° close tolerance bolt, .1900-32 thread, grip .125, length .448

Notes

- Part number format as commonly written; check the standard for the exact format.
- Approved data governs. Use the bolt the SRM, drawing or IPC calls for.

SOURCES · NAS4403 — Bolt, 100° Close Tolerance, Tri-Slot Recess

SCAN · OPEN THIS DATA SHEET
theaviationpoint.com/parts/structural-bolts/nas4403/

Reference data. The aircraft manufacturer's documentation (SRM / IPC) takes precedence.